

# Technical Bulletin

## R•O•M Roll-up Door – Vented Slat

---


*Our Technical Bulletins are provided to inform you of design options, design improvements, standard sizes and changes, different models, applications, installation, operation, and maintenance.*

---

An option available on the R•O•M Roll-up Door is the vented slat.

The vented slat has the following features:

- Vents are located as shown.

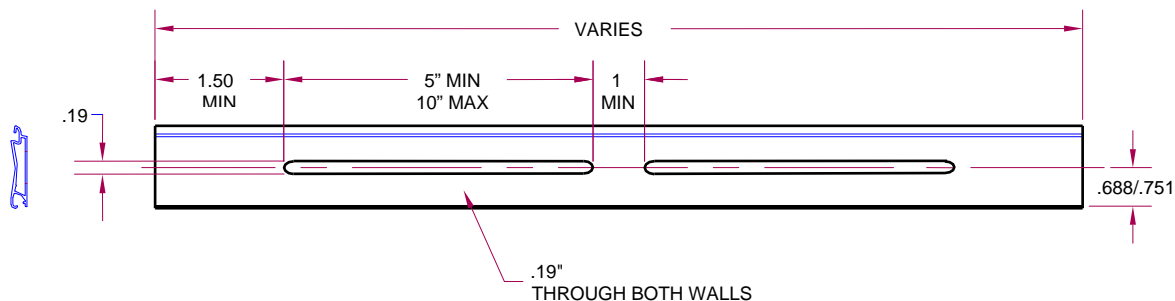

- The vent can be placed on any slat within the shutter assembly, except for the slat just above the bottom rail and the top slats hidden in the header. The overall location of each vent and the number within a shutter is up to the customer.
- There is no limitation on width and height of the shutter as long as it falls within the standard shutter sizes offered. However, Safe Fleet Engineering reserves the right to review and modify the vent placement to ensure product integrity. Any modification will be reviewed with the customer prior to changing.

For additional information, please contact your Safe Fleet Customer Representative at 800-827-3692.