


DUROLUMEN™


THE VERSATILE UTILITY LED

R.O.M™

A Safe Fleet Brand

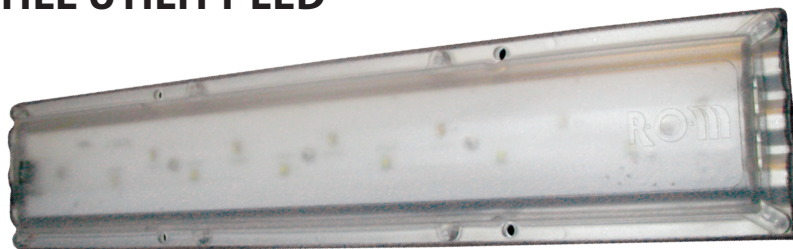


Surface mount

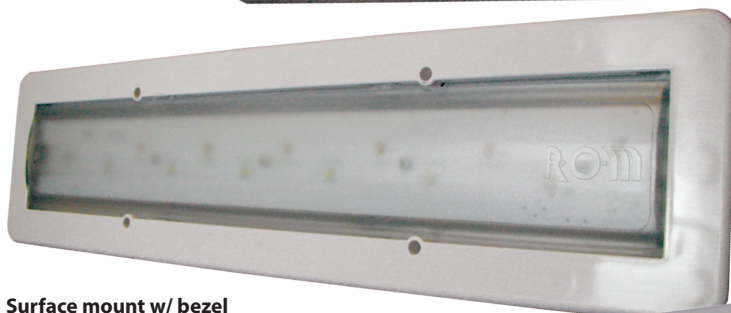


Surface mount w/ bezel




Recessed mount

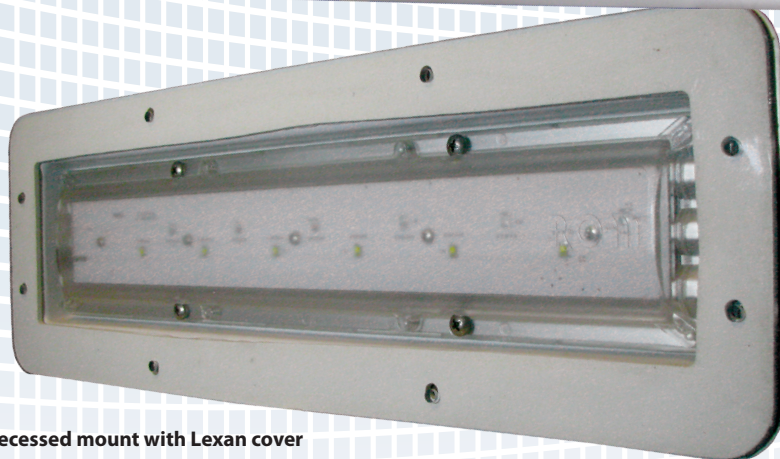


Recessed mount with Lexan cover

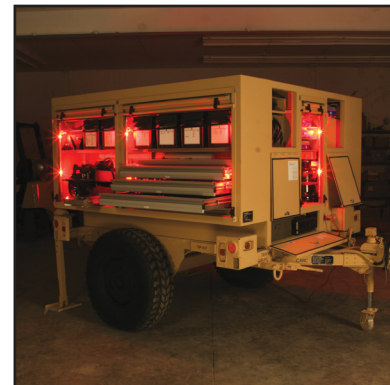

Utility and military applications

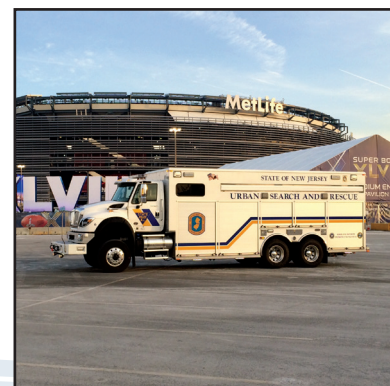

Incident command applications

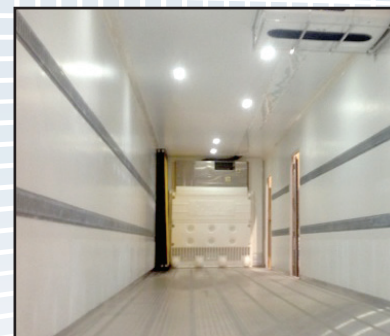

Truck and trailer applications



7-YEAR WARRANTY
Industry best warranty;
7-years



EXTREME TEMP
Certified operation
between -25°F and 150°F



MOISTURE
Withstands a 30-minute
water submersion test
while operating
(IPX7 rating)



SHOCK AND VIBE
Day-to-day jarring is no
match for solid state
electronics. Tested to military
standard (MIL 810-A)



BATTERY
Operating voltage
9-16 VDC



BRIGHT BEAM
White/White model allows for
high or low beam intensity
(user supplied switch)

- **Reverse polarity and over/under voltage protected**
- **Easy retrofit - fits Grote and TruckLite hole patterns: 3.5" x 16" x 1"**
- **Recessed housing pan fits tight along walls and ceilings**

COLOR	DESCRIPTION	SURFACE MOUNT	SURFACE MOUNT WITH WHITE BEZEL	RECESSED MOUNT	RECESSED MOUNT WITH LEXAN COVER	LUMENS	AMP	VOLTAGE RANGE
white	Low intensity light	R03694	R03963	R03851	R03958	1400	1.25	9-16VDC
red/white	Red or white light switchable with user supplied switch	R03695	N/A	R03852	N/A	1400 white/ 500 red	1.25	9-16VDC
white/white	High or low intensity switchable with user supplied switch	R03696	N/A	R03853	N/A	2800 high/ 1400 low	2.5 high/ 1.25 low	9-16VDC

