Technical Bulletin

R•O•M Roll-up Door

How to Measure for Slats & Bottom Rail

Our Technical Bulletins are provided to inform you of design options, design improvements, standard sizes and changes, different models, applications, installation, operation, and maintenance

HOW TO MEASURE FOR REPLACEMENT SLATS

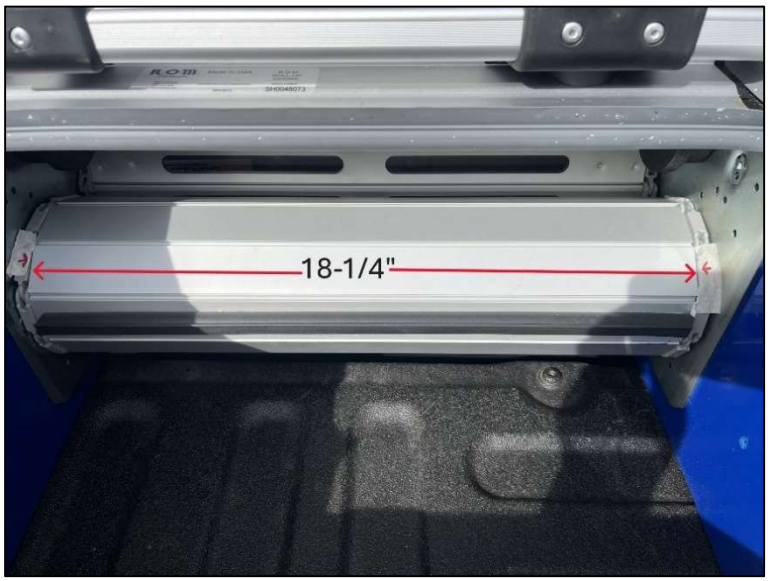

Measuring for new/replacement Slats for a R•O•M Roll-up Door can be done while the door is in the raised position, at the top part of the compartment while rolled up.

Measure the length of the metal slat only (metal to metal).
DO NOT measure the gray plastic shoes on each end.

HOW TO MEASURE FOR A NEW or REPLACEMENT BOTTOM RAIL

Measuring for a new or replacement Bottom Rail for a R•O•M Roll-up Door can be achieved on the front of the door under the lift bar.

Measure the length of the metal part of the Bottom Rail only (metal to metal), between the black plastic blocks. **DO NOT include the black plastic blocks in the measurement.**

For additional information, please contact R•O•M Customer Service at: (800) 827-3692 ext. 5000 or rom.orders@romcorp.com.

Please provide this information to your engineering, manufacturing, sales and marketing departments, and to your dealers.

These drawings & the information contained herein are the confidential & proprietary intellectual property of R•O•M and should not be disclosed to any third party without the express prior written consent of R•O•M.